

## WARRANTY



ORTIK guarantees every product we sell. We put a great effort into every product to stand up to the use for which it was designed. We choose the best materials and provide you with the highest level of manufacture. If one of our products does not meet your expectations during its useful life, we promise to repair it, replace it, exchange it, or give you a refund. ORTIK does not warranty products against normal wear and tear, unauthorized modifications or alterations, improper use, improper maintenance, misuse or neglect or if the product is used for a purpose for which it is not intended. Except as expressly set forth in these terms and conditions, ORTIK is not liable for any direct, indirect or consequential damages arising out of or resulting from the use of a ORTIK product.

This warranty does not cover damages caused by improper care, accidents or natural breakdown of materials over extended time and use. All products should be returned to us for evaluation and will be repaired or replaced at our discretion. Damages due to accident or improper care will be repaired at a reasonable rate.

## TRADEMARKS

All registered product names are registered trademarks of Fórmula Inovadora S.A. Except as expressly granted by writing, neither Fórmula Inovadora S.A., or any its suppliers grant any express or implied right to anyone for any patents, copyrights, or trademarks.



w w w . o r t i k . n e t




**3V CONNECTOR**

approach line connector

**1**

Connect the 2V with two vestibules. Stretch it open on the ground and anchor it with pegs.



## overview

With 3 tent vestibules, you can create a bigger storage or shelter space, using only one trekking pole for structure. Connect it also with a tent and 2 vestibules, one for gear or cooking and the other for entrance.

## features


- . lightweight, spacious and compact.
- . easy assembly using trekking poles for structure.
- . assemble a single unit or a modular structure
- . UV resistant coating

## specs


- . Resistant nylon ripstop with a durable coating of three layers of silicone on the outside and 1500 mm PU coating on the inside

**2**

Place inside a trekking pole and extend it until the 2V is totally stretched.

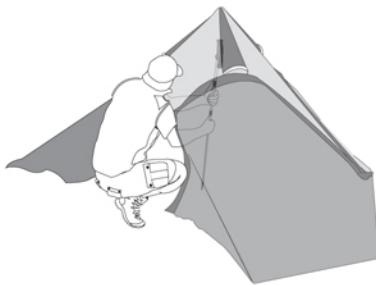
**3**

The 2V should look like this, when connected to vestibules.

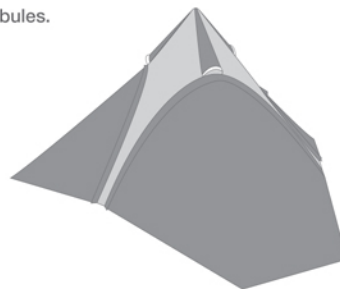

## dimensions

a - 228 cm  
b - 277 cm  
c - 130 cm

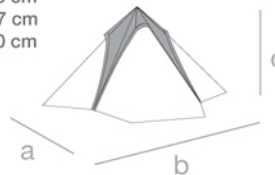

## weight

500 gr / 1,1 lb



## EXTRA PARTS



If you have additional questions please contact ORTIK at [www.ortik.net](http://www.ortik.net)

Extra Parts are SOLD SEPARATELY.